

**PROCESS DEVELOPMENT & CONTROL, INC.**

1075 MONTOUR WEST INDUSTRIAL PARK

CORAOPOLIS, PENNSYLVANIA 15108

PHONE (724) 695-3440 ♦ FAX (724) 695-8635

**INSTALLATION, OPERATION AND MAINTENANCE FOR 1-1/2" THRU 4"  
THREAD END VALVES WITH STYLE "A" MANUAL LEVER HANDLE**

RELEASED: 04/03/95	ID #	APPROVED BY:	DATE:
REV.: Added EIB 12.1 3/14/03	EIB 1.2.1.2	SALES:	
		ENGINEERING:	

TABLE OF CONTENTS

DRAWING NUMBER ..... 076-007-000

STORAGE AND HANDLING OF VALVE ASSEMBLIES  
..... EIB 12.1

THREAD END VALVE INSTALLATION INSTRUCTIONS  
..... EIB 1.2

OPERATION & MAINTENANCE FOR THREAD END VALVES  
..... EIB 9.1

# PROCESS DEVELOPMENT & CONTROL, INC.

1075 MONTOUR WEST INDUSTRIAL PARK  
CORAOPOLIS PENNSYLVANIA 15108  
PHONE (724) 695-3440 ♦ FAX (724) 695-8635

## STORAGE AND HANDLING OF VALVE ASSEMBLIES

<b>RELEASED:</b> 3/12/2003	<b>ID #</b>	<b>APPROVED BY:</b>	<b>DATE:</b>
<b>REV.:</b>	<b>EIB 12.1</b>	<b>SALES:</b>	
		<b>ENGINEERING:</b>	

### TABLE OF CONTENTS

INSPECTION PROCEDURE .....	Section 1, Page 1
HANDLING PROCEDURE .....	Section 2, Page 1
STORAGE PROCEDURE .....	Section 3, Page 1

# PROCESS DEVELOPMENT & CONTROL, INC.

## ENGINEERING INSTRUCTION BULLETIN

EIB.: 12.1 ORIGINAL DATE: 3/12/2003 PAGE: 1 of 1 REVISION: Released DATE:3/12/03

### TITLE: STORAGE AND HANDLING OF VALVE ASSEMBLIES

#### 1. INSPECTION PROCEDURE


1.1 Valve assemblies should be inspected upon receiving and prior to installation. Carefully remove the valve assembly from its shipping crate or box. Valve and accessories should be inspected for damage. The valve sealing surfaces should be inspected for scratches.

#### 2. HANDLING PROCEDURE

2.1 Never lift or move the valve assembly using the disc, valve seat (bore), shafts or packing follower / nut as a pressure point.

2.2 Never lift or move the valve assembly by using the actuator, positioner, tubing or other attached accessories.

2.3 It is recommended that lifting straps (instead of chains or hooks) be used around the valve stem neck and thru the flange bolt holes for pressure points.

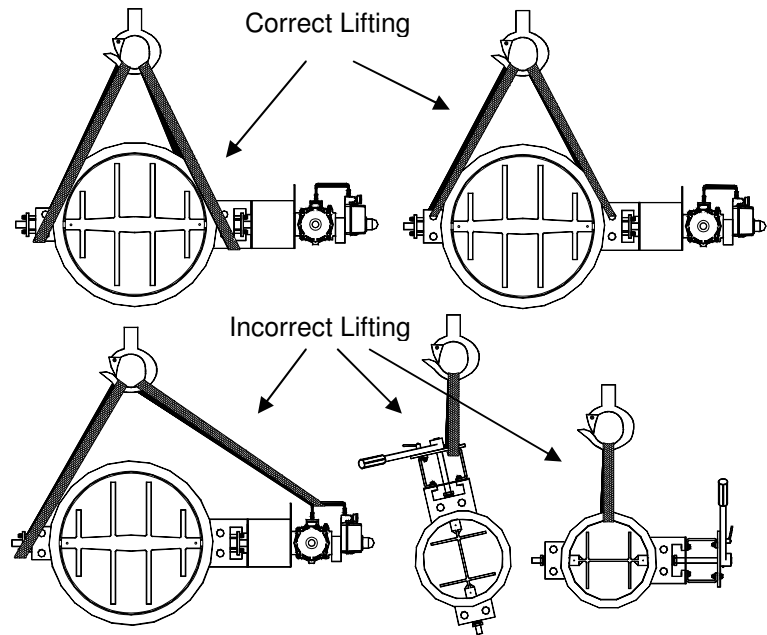

#### 3. STORAGE PROCEDURE

3.1 Valve assemblies should be kept in a clean, heated, weather tight (dry), well-ventilated, fire-resistant storage facility with flooring that seals against dust and dirt and will not be subject to flooding. If outdoor storage is unavoidable, support the valve assembly off of the ground and protect with a watertight cover on all sides.

3.2 Valve assemblies should be stored off of the floor on suitable skids, pallets or racks and protected from dirt, debris and exposure to direct sunlight, particularly to elastomer sealing surfaces.

3.3 Valve assemblies should be protected from rodents, insects or other creatures which can cause damage.

3.4 The proper use of racks, pallets, and handling equipment shall be used. The assemblies should be arranged so as to prevent damage to protruding accessories during storage.

3.5 Valve assemblies with electrical components, pneumatic tubing, positioners, actuators, and other accessories should be protected from impact.

3.6 Rubber seated valves should be stored with the disc slightly opened, (about 5°), if practical.

**PROCESS DEVELOPMENT & CONTROL, INC.**

**ENGINEERING INSTRUCTION BULLETIN**

**EIB.: 1.2**

**ORIGINAL DATE: 8/1/89**

**PAGE 1 OF 1**

**REVISION 2**

**Date: 12/16/91**

**TITLE: THREAD END BUTTERFLY VALVE INSTALLATION INSTRUCTIONS**

**1.2 INSTALLATION**

1.2.1. Remove valve assembly from box or crate with caution. Check assembly for possible damage during shipping.

1.2.2. Valves may be installed with flow in either direction and in either a horizontal or vertical line.

1.2.3. Check alignment of threaded pipe before installation. Carefully match threads of valve to pipe to avoid any mis-alignment. Do not over tighten

# PROCESS DEVELOPMENT & CONTROL, INC.

## ENGINEERING INSTRUCTION BULLETIN

EIB.: 9.1 ORIGINAL DATE: 3/12/2003 PAGE: 1 of 1 REVISION: Released DATE:3/12/03

TITLE: OPERATION AND MAINTENANCE FOR THREAD END VALVES

### 1. OPERATION

1.1. To position the disc between 0° (closed) and 90° (open), loosen the thumb screw counterclockwise. Locate the desired disc position. Tighten the thumb screw clockwise until snug.

### 2. MAINTENANCE

2.1. No maintenance is required because of the simplicity of construction.

PDC does not recommend any spare parts for this unit.